

# Special Issue: Modelisation of Sustainable Urban & Landscape Drainage Systems and Scientific Identifiers in India

Ravi Gonella\*<sup>ID</sup>, Pratik Rao

Dan Orfester Engineering Solutions Ltd., London, United Kingdom

Email: \*ravi.gonella@danorfester.com, pratik.rao@danorfester.com

**How to cite this paper:** Gonella, R., & Rao, P. (2024). Special Issue: Modelisation of Sustainable Urban & Landscape Drainage Systems and Scientific Identifiers in India. *Current Urban Studies*, 12, 585-597. <https://doi.org/10.4236/cus.2024.124029>

**Received:** September 5, 2024

**Accepted:** October 27, 2024

**Published:** October 30, 2024

Copyright © 2024 by author(s) and Scientific Research Publishing Inc. This work is licensed under the Creative Commons Attribution International License (CC BY 4.0).

<http://creativecommons.org/licenses/by/4.0/>



Open Access

## Abstract

Indian ancient urban drainage systems are today convertible modern sustainable drainage systems which place engineering scientific practices of surface, sub-surface drainage systems and storm water management in a new Smart Capital operation of “Amaravati” in the State of Andhra Pradesh (AP) in India. Urban drainage systems, on the other side, are an essential part of water conservation and preservation. Managing and dispersing water runoff volumes and flowrates will water our vegetation without drowning it and enhance water quality. The collected water is used to replenish town’s fresh water supply. Therefore, selecting proper drain systems is of vital importance in sustainable urban development. To achieve this, we have developed the drain cycle to explain better how drain systems work and recommend the revised scientific research methods and to establish them. In this paper, we emphasize the significant findings of Smart & Sustainable drainage design systems for various urban applications and we also propose the two scientific identifiers, “UK2AP” & “AP2UK” for AP State Capital “Amaravati” development as prime course of initiative.

## Keywords

Amaravati Urbanisation, Amaravati Landscape, Drains, Drainage Systems, UK2AP, AP2UK


## 1. Introduction

A drain is referred to a single pipe, channel, or path that is used to remove liquid. Whereas drainage refers to the entire system made of one or many drains used to

\*Corresponding author.

remove surplus water or liquid waste.

Sustainable or urban drainage systems are a collection of water management practices that aim to align modern drainage systems with natural water processes and are part of a larger green infrastructure strategy. Sustainable drainage systems (2024) make urban drainage systems more compatible with the natural water cycle such as storm surge overflows, soil percolation and bio-filtration (see Appendix: The Water Cycle). They mitigate the human development on the natural water cycle, particularly surface runoff and water (agricultural, industrial) pollution trends. Further, this section is explained by the drain cycle as seen in **Figure 1**.

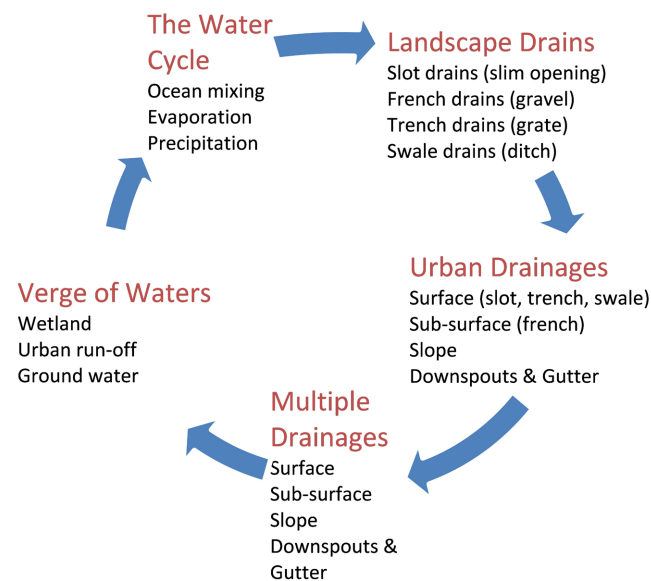

**Figure 1.** The Drain Cycle (Copyright of Gonella et al.).

In below topics, we discuss the selection types and models of urban and landscape drain systems and technology transfer through developed Scientific model builders to AP State Capital “Amaravati” in India.

## 2. Selection of Urban & Landscape Drain Systems

### 2.1. Type of Urban Drainage Systems

#### Surface drainage system

Surface drainage systems remove excess water from the land’s surface through channels or ditches. In some cases, the ground surface is shaped or graded to create sloping toward the channels. Types of surfaces drainage systems are open drains, humps and hollows, levees, and grassed waterways. A cast-in-place trench drain is a good example of a surface drainage system (Guo et al., 2024).

#### Sub-surface drainage system

Subsurface drainage systems are implemented beneath the top layer of soil. Sometimes referred to as a French drain, they work at the root level to remove excess water. Dig ditches to install the pipes of subsurface drains (Guo et al., 2024).

### Slope drainage system

Slope drainage systems are built to allow water to flow from a structure in a downward direction. It is done with the aid of pipes that move down through the slope. Since the installed pipe is anchored to an incline, it guides the water through the pipe to get it swiftly away from the structure (Guo et al., 2024).

### Downspouts and gutter systems

Downspouts and gutter systems are a structure's first defense against over-saturation from storm water. They are often drained into an aluminum extension, buried drainpipe, rain barrel, or other solution. The purpose is to move water away and route water to other drainage systems on the street or sidewalk. Sometimes they are even connected to an underground sewer line using gutter drains or "underground drains" (Guo et al., 2024).

## 2.2. Selection of Landscape Drain Systems

Landscaping is an art and is important to maintain the property ensuring that the landscape gets sufficient water and that any excess is properly drained is vitally important consideration. The proper drainage system is chosen to combat standing water, runoff, and heavy rains (ISOLA, 2024).

### 2.2.1. Slot Drain System

A slot drain is a linear drain used to evacuate water, runoff or liquids in a facility. The difference between a slot drain and the traditional trench drain is that the slot drain has no grating (see Figure 2) (van Vuuren, 2020).



Figure 2. Slot drain systems.

The slot drain system is most similar to trench drains, but is a thinner, more modern approach to the design. Because of the slot drain's slim opening, it also eliminates the need for bulky, unsightly grates. A smaller opening doesn't mean a slot drain is any less effective, however, since the larger drain channel is actually situated underground.

Many slot drain systems can even handle the heaviest of rainfalls, transporting the water to a desired drainage point thanks to their pre-sloped design. Since the slot opening is only 0.5 to 1.25 inches wide, it helps to prevent large solid material from entering the drain, preventing clogs (Bohuslav, 2004).

### Hydroplaning

Hydroplaning also called as aquaplaning, is the partial or full separation between the wheels of a vehicle and the pavement surface caused by the excessive

water pressure accumulated between the vehicle's wheels and the pavement surface. Another safety concern with wet pavement conditions is the "splash and spray" effect. When a vehicle travels on a wet pavement surface, the tyres of the vehicle accumulate the water from the pavement surface and spread clouds of small droplets into the air, resulting in poor visibility and unsafe driving conditions for road users.

Hydroplaning is directly proportional to the depth of the water film on the pavement surface and is highly influenced by fundamental factors such as the driving characteristics, vehicle dynamics, pavement conditions (geometric design, drainage design and maintenance) and several environmental factors (Chaithoo & Allopi, 2012). According to Brown et al. (2009), hydroplaning can occur at travelling speeds from 89 km/hr with water depths starting at 2 mm, NAASRA (1974) states that water depths ranging between 2.5 mm and 5 mm can cause friction loss between tyres and the pavement surface without actual aquaplaning occurring. However the critical water film depth for aquaplaning to initiate may vary between 4 mm and 10 mm depending on other characteristics of the pavement surface (NAASRA, 1974).

#### Water film depths

A review of relevant literature has shown that the water film depth (WFD) on a pavement surface can accurately be predicated with a variety of empirical or analytical methods. These methods apply influencing variables such as drainage flow path slopes, drainage flow path lengths, rainfall intensities, Manning n-values, time of concentration and texture depths.

The RRL (Road Research Laboratory) method by Russam and Ross (1968) suggested to determine the water film depth on pavements in South Africa. This method is defined by two concepts, namely the gradient (slope) and distance (length) of the drainage flow on the pavement surface. The drainage flow path length is the minimum distance that the water must flow from the point at which it falls on the surface to the edge of the pavement and is measured along its flow path slope which depends on a combination of the pavement width, cross slope and longitudinal slope. The following equations are used and adapted from the SANRAL drainage manual (SANRAL, 2013) to estimate the water film depth on a pavement surface according to the RRL method:

To calculate the slope of the flow path (laminar flow conditions are assumed):

$$S_f = \sqrt{n_1^2 + n_2^2} \quad (1)$$

where,

$S_f$  is the flow path slope (%);

$n_1$  is the pavement cross fall (%);

$n_2$  is the pavement gradient (%).

(The flow path slope is determined assuming a planar road surface, without super-elevation).

To calculate the length of the flow path (laminar flow conditions are assumed):

$$L_f = W * \frac{S_f}{n_1} = W * \sqrt{1 + \left(\frac{n_2}{n_1}\right)^2} \quad (2)$$

where,

$L_f$  is the length of flow path (m);

$W$  is the pavement width (m).

The water flow depth can consequently be determined as:

$$d = 4.6 * 10^{-2} * (L_f * I)^{0.5} * S_f^{-0.2} \quad (3)$$

where,

$d$  is the water flow depth (mm);

$I$  is the rainfall intensity (mm/h).

Gallaway et al. (1979) developed a different empirical method for the United States Department of Transportation in cooperation with the Federal Highway Administration (FHWA) to accurately predict the water film depth (WFD) on a pavement surface [9]. This method is detailed in the Texas Department of Transportation's (CSRA, 1984) hydraulic design manual. Bohuslav (2004) presents an empirical relationship between the drainage flow path length, the pavement slope, the rainfall intensity and the mean texture depth of the pavement surface. Gallaway et al. (1979) and Oakden et al. (1977) both recommended that the WFD on a pavement surface should be limited to a maximum depth of 4 mm.

$$WFD = z * \frac{TXD^{0.11} * L^{0.43} * I^{0.59}}{S^{0.42}} - TXD \quad (4)$$

where,

$WFD$  is the water film depth above the top of the surface asperities (mm);

$z$  is the constant (0.01485);

$TXD$  is the mean pavement texture depth (mm, 0.5 mm for design);

$L$  is the length of drainage path (m);

$I$  is the rainfall intensity (mm/h, with a minimum of 50 mm/hr);

$S$  is the slope of drainage path (%).

(The values for the variables provided were obtained from TxDOT's hydraulic design manual (Bohuslav, 2004)).

Chaithoo & Allopí (2012) developed an independent software tool to determine flow depths on pavement surfaces by considering various hydraulic factors. The calculations confirmed that the flow depth of surface water will increase when the width of the road increases or the road gradient increases. Conversely, the flow depth will decrease if the road cross fall increases.

Anderson et al. (1998) have studied and identified three different techniques to control water film thickness on pavement structures:

- 1) Controlling the pavement geometry.
- 2) Implementing textured pavement surfaces (asphalt, grooved concrete, ultra-thin friction course (UTFC)).

### 3) Installing effective drainage appurtenances.

The surface drainage systems implemented to reduce water film depths on pavements should have the capability to intercept surface water efficiently with a minimum susceptibility to clog.

#### **Interception efficiency of slotted inlets**

The interception efficiency ( $E$ ) of an inlet is the ratio between the total amount of water flow intercepted and the total amount of flow approaching the inlet, expressed as a percentage. This is dependent on a number of influencing factors, such as the inlet characteristics (length, width, curb opening, etc), the pavement slopes (longitudinal and cross slopes), the velocity, and the flow depth of the approaching flow. The interception efficiency of an inlet decreases as the approaching flow velocity increases towards the inlet, as well as when the flow width of the approaching flow is greater than the inlet width (Brown et al., 2009).

The interception efficiency of an inlet is expressed by the following equation:

$$E = \frac{Q}{Q_i} * 100 \quad (5)$$

where,

$E$  is the interception efficiency (%);

$Q$  is the total flow ( $m^3/s$ );

$Q_i$  is the intercepted flow ( $m^3/s$ ).

Some slotted drain inlets are installed in the center of highways or multi-carriageway pavements to operate individually or with a type of barrier placed along the longitudinal length of the drain. This barrier can improve the road safety during wet pavement conditions, as the surface water which is not intercepted by the inlets accumulates against the barrier without flowing to the opposite side of the roadway.

Thus slot drains are incredibly durable and functional with beautiful landscaped areas. It can act as an elegant offering a stylish border to an area. They are perfect for areas with brick paving's or concrete making them an ideal option for large parks, public patio gardens, plazas, and similar areas.

#### **2.2.2. French Drain System**

A French drain, also called a weeping tile, trench drain, filter drain, blind drain, rubble drain, rock drain, drain tile, perimeter drain, land drain, French ditch, sub-surface drain, sub-soil drain, or agricultural drain, is a trench filled with gravel or rock or both with or without a perforated pipe that redirects surface water and ground water away from an area. French drains help keep water out of basements and other low areas around the property (see [Figure 3](#)).

For French drains, HYDRUS-2D model is used for the dynamic simulation of soil water and salinity under the subsurface drainage conditions and a two-dimensional saturated-unsaturated Richards equation was adopted to describe soil water movement (Guo et al., 2024):

$$\frac{\partial \theta}{\partial t} - \frac{\partial}{\partial x} \left[ K(\theta) \frac{\partial \theta}{\partial x} \right] + \frac{\partial}{\partial z} \left[ K(\theta) \frac{\partial \theta}{\partial z} \right] + \frac{\partial K(\theta)}{\partial z} - S \quad (6)$$

where,

$\theta$  is the volumetric water content;


$K(\theta)$  is the unsaturated soil hydraulic conductivity;

$t$  is the time;

$S$  is a sink term which is set to 0 in this paper;


$x$  is the horizontal coordinate;

$z$  is the vertical coordinate.

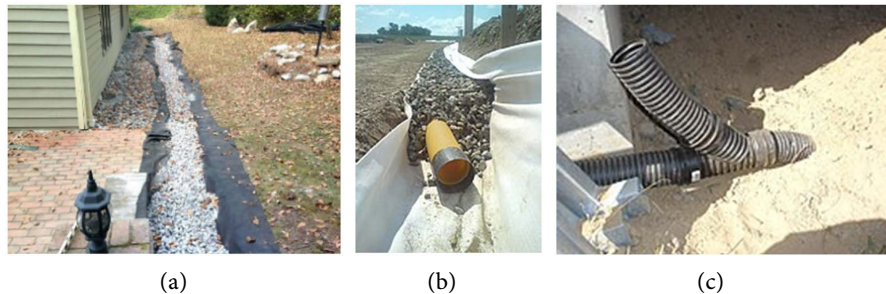

**Figure 3.** (a), (b) French drain under construction; (c) A wye-joining a perforated and solid corrugated pipe to a buried solid outlet.

French drains are primarily used to prevent ground and surface water from penetrating or damaging building foundations and as an alternative to open ditches or storm sewers for streets and highways. The variations of French drain include (see **Figure 4**):

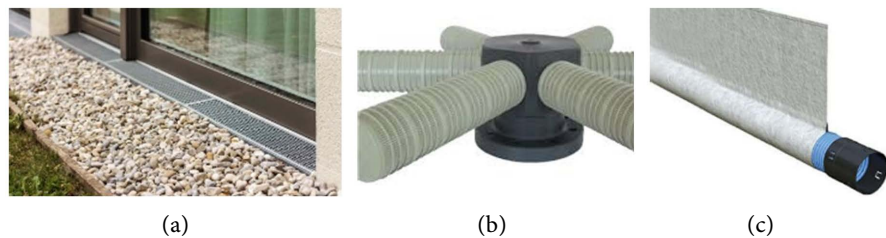

**Figure 4.** (a) Curtain drain; (b) Collector drain; (c) Fin drain.

#### Curtain drain

Curtain drains are surface drains that are often around foundations of homes on a sloped land. They comprise of a perforated pipe surrounded by gravel. It is similar to the traditional French drain, the gravel or aggregate material of which extends to the surface of the ground and is uncovered to permit collection of water, except that a curtain drain does not extend to the surface and instead is covered by soil in which turf grass or other vegetation may be planted so that the drain is concealed.

#### Filter drain

This form drains ground water.

### Collector drain/Interceptor drain

Collector drains combines drainage of groundwater and interception of surface water or run off water and may connect into the underground pipes so as to rapidly divert surface water. It preferably has a cleanable filter to avoid migration of surface debris to the subterranean area that would clog the pipes.

### Dispersal drain


This drain distributes waste water that a septic tank emits.

### Fin drain

The fin drain comprises a subterranean perforated pipe from which extends perpendicularly upward along its length a thin vertical section, denominated the “fin” of aggregate material for drainage to the pipe length of 200 mm (7.9 in). Fin drains are used at highway edges to collect and channel seepage water at carriage-way edges detailing a perforated drainage pipe wrapped in geotextile and bedded to the base of a filter stone trench.

### 2.2.3. Trench Drain System

A trench drain also called channel drain, line drain, linear drain, or strip drain; is a specific type of floor drain containing a dominant trough or channel shaped body. It is used for the rapid evacuation of surface water or for the containment of utility lines or chemical spills (see **Figure 5**).

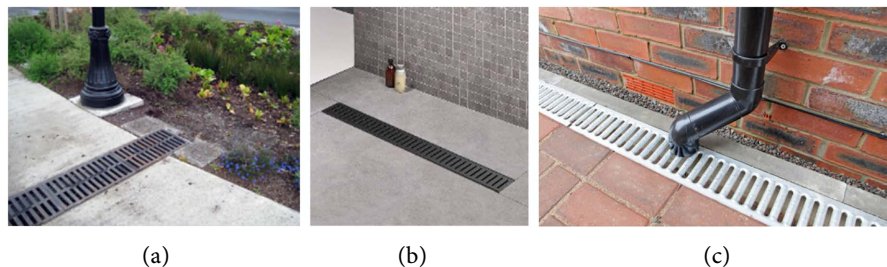


**Figure 5.** (a) Strip drain; (b) Linear drain; (c) Channel drain.

Trench drains are designed to intercept the flow of surface water runoff over vast expanses and are essentially a large drain channel with a heavy grate on top of it. This is the kind of drainage system that is found around commercial buildings such as restaurants and loading docks. They help to keep the pavement around the trench drain dry, helping to prevent slips and falls. Trench drains come in many different sizes in loading docks or city streets to pool decks. Trench drain is a classical approach as reflected to slot drain (Cotecchia et al., 2020).

### 2.2.4. Swale Drain System

A swale drain is essentially a ditch that gets covered or lined with either grass or another type of vegetation. The goal of a swale drain is to slow and control water runoff to prevent flooding, puddling, and soil erosion. It can also help avoid overwhelming storm drain systems with an influx of water ([www.wikipedia.org](http://www.wikipedia.org)/see **Figure 6**).

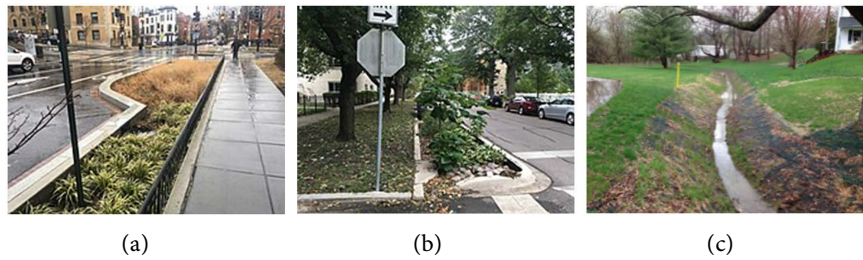

**Figure 6.** (a) Runoff from the vicinity flows into an adjacent bioswale; (b) Swale drain.

Swale drain stand out from a regular ditch is by being shallow, it slows down the spread of water runoff allowing it to gradually filter into the soil on its own which is less harmful to the surrounding landscaping. Swale drains typically have a curved profile that starts from one edge and flows gently down and then up allowing even extensive swales to look as if they are part of the sculpting of the surrounding landscape. Swales are often used in residential and commercial areas and even in sustainable landscapes as a means of water conservation.

### 3. Visual Applications of Smart Drain Systems

The Smart drain systems fall in variety of applications such as transportation & terminals, industrial & commercial and residential which are depicted in Visual presentation (Image Source: [www.abtdrains.com](http://www.abtdrains.com)/see **Figures 7-9**).



7(a) Roadway



7(b) Airport



7(c) Cargoport



7(d) Railways



7(e) Seaport



7(f) Tunnels & Bridges



7(g) Car Parking

**Figure 7.** Transportation & terminal drainage solutions.



8(a) Refinery



8(b) Manufacturing



8(c) Food processing



8(d) Pharmaceuticals



8(e) Loading dock



8(f) Assembly plants



8(g) Wet processing

**Figure 8.** Industrial drainage solutions.



9(a) Driveways



9(b) Patios & Sidewalks




9(c) Garages



9(d) Pool decks



9(e) Downspouts



9(f) Yard/Lawns



9(g) Roof Gutter

**Figure 9.** Residential drainage solutions.

#### 4. Technology Transfer Developments of Amaravati-AP

The Smart Capital operation of “Amaravati” is a new-to-build planning infrastructure of India with the State-of-the-Art of preservation of World technologies. The above Visual applications depict the modern science establishment. The technology Start-up, Dan Orfester Ltd from UK boosts the energisation and foreign direct investments (FDI) of AP State Capital Amaravati by introducing the following models.

(A) Model-1: UK2AP Identifier

UK2AP is an advanced Smart technology import model developed by M/S. Dan Orfester, shall act as a focal point of scientific technology transfer for all Engineering & Consultancy aspects of UK2AP for importing as-built Urban & Civil infrastructure technologies from United Kingdom (UK) to Andhra Pradesh (AP).


(B) Model-2: AP2UK Identifier

In lieu of above, the AP2UK is a model built-in proposal that exports IT, Engineering, Multimedia professionals to United Kingdom (UK) from Andhra Pradesh (AP).

#### 5. Conclusion

The smart and scientific urban & landscape sustainable technologies shall be

adopted for Amaravati-AP State Capital development. To achieve this, Dan Orfester-UK (Indian Group) has researched the global market in urban planning systems and introduced two innovative Scientific model builders: (1) UK2AP & (2) AP2UK, for internal drawdown of exports and imports for Urban & landscape modelisation and capitalisation of Amaravati-AP. The proposed Model builder license shall be released to utilise by the State of Andhra Pradesh Government, India ([www.ap.gov.in](http://www.ap.gov.in)) as depicted in **Figure 10**.

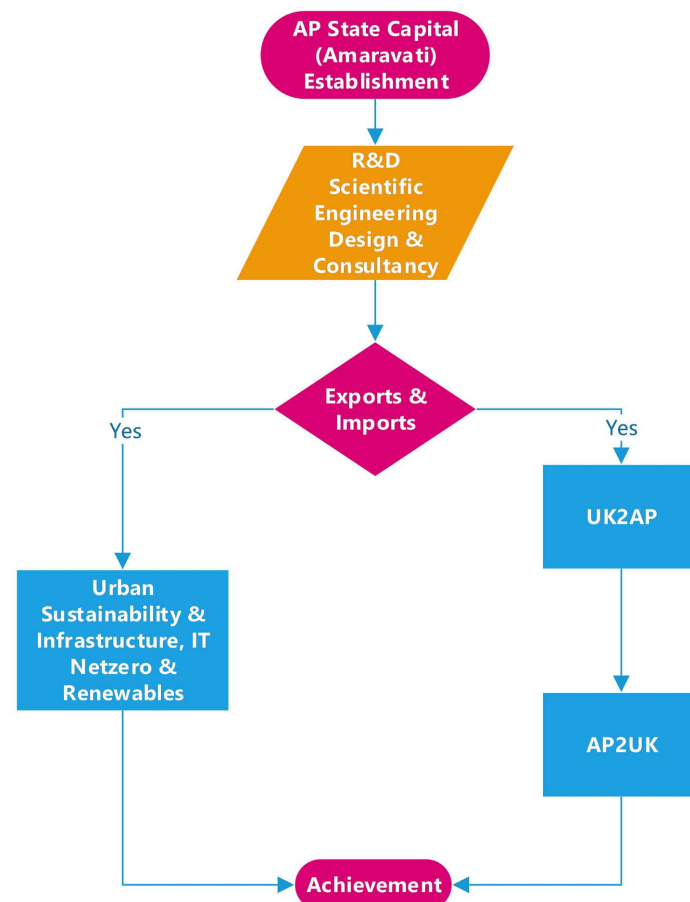

**Figure 10.** Model builder for AP State Smart capital operation of Amaravati, India.

## Conflicts of Interest

The authors declare no conflicts of interest regarding the publication of this paper.

## References


- Anderson, D. A., Huebner, R. S., Reed, J. R., Warner, J. C., & Henry, J. J. (1998). *Improved Surface Drainage of Pavements*. National Cooperative Highway Research Program (NCHRP). <https://doi.org/10.17226/6357>
- Bohuslav, K. (2004). *Hydraulic Design Manual*. Texas Department of Transportation.
- Brown, S. A., Schall, J. D., Morris, J. L., Doherty, C. L., Stein, S. M., & Warner, J. C. (2009). *Urban Drainage Manual* (3rd ed.). Federal Highway Administration, US Department of

Transportation.

- Chaithoo, D. B., & Allopi, D. R. (2012). A Software Tool Approach to Re-Evaluating Super Elevation in Relation to Drainage Requirements and Vehicle Dynamics—A Case Study. In *31st South African Transport Conference (SATC)*. Document Transformation Technologies. <http://hdl.handle.net/2263/20105>
- Cotecchia, F., Petti, R., Milella, D., & Lollino, P. (2020). Design of Medium Depth Drainage Trench Systems for the Mitigation of Deep Landsliding. *Geosciences*, *10*, Article 174. <https://doi.org/10.3390/geosciences10050174>
- CSRA (Committee of State Road Authorities) (1984). *Technical Methods for Highways 6 (TMH6)—Special Methods for Testing Roads*. Department of Transport.
- Gallaway, B. M., Ivey, D. L., Hayes, G. et al. (1979). *Pavement and Geometric Design Criteria for Minimizing Hydroplaning*. Texas Transportation Institute.
- Guo, C. Y., Yao, C. Z., Wu, J. W., Qin, S., Yang, H. Y., Li, H., & Mao, J. (2024). *Field and Numerical Experiments of Subsurface Drainage Systems in Saline and Low-Permeability Interlayered Fields in Arid Regions*. Elsevier Science Direct Publisher.
- ISOLA (Indian Society of Landscape Architects) (2024). <https://www.isola.org.in>
- NAASRA (National Association of Australian State Road Authorities) (1974). *Drainage of Wide Flat Pavements*.
- Oakden, G. J. (1977). *Highway Surface Drainage: Design Guide for Highways with a Positive Collection System*. Roading Directorate, Ministry of Works and Development.
- Russam, K., & Ross, N. F. (1968). *The Depth of Rain Water on Road Surfaces. Report No. LR 23625*. Road Research Laboratory, UK Ministry of Transport.
- SANRAL (South African National Roads Agency Limited) (2013). *Drainage Manual* (6th ed.). SANRAL.
- Sustainable Drainage System. [https://en.wikipedia.org/wiki/Sustainable\\_drainage\\_system](https://en.wikipedia.org/wiki/Sustainable_drainage_system)
- van Vuuren, B. J., van Dijk, M., & vdM Steyn, W. J. (2020). The Interception Capabilities of Slotted Drains as Pavement Surface Drainage Systems. *Journal of the South African Institution of Civil Engineering*, *62*, 11-19. <https://doi.org/10.17159/2309-8775/2020/v62n4a2>

# Appendix: The Water Cycle

Source: [https://en.wikipedia.org/wiki/Water\\_cycle](https://en.wikipedia.org/wiki/Water_cycle).

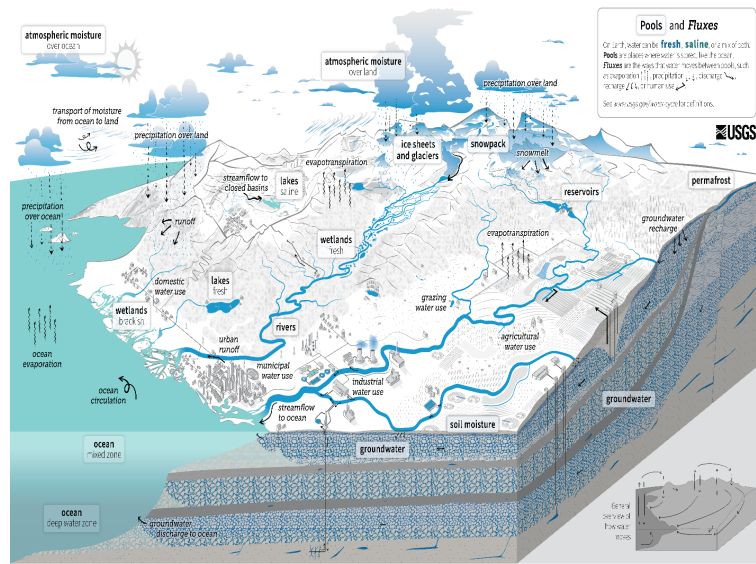

## The Water Cycle

The water cycle describes where water is on Earth and how it moves. Water is stored in the atmosphere, on the land surface, and below the ground. It can be a liquid, a solid, or a gas. Liquid water can be fresh water (like) or a mix (brackish). Water moves between the planet's surface and below the ground. In the soil, frozen water is stored as **permafrost** and liquid water is stored as **soil moisture**. Deeper below ground, liquid water is stored as **groundwater** in aquifers, within cracks and pores in the rock.

**Pools** store water. 97% of all water is stored in **oceans** and **saline**. On land, salt water is stored in **saline lakes**. Fresh water is stored in liquid form in **freshwater lakes**, artificial **reservoirs**, **rivers**, and **wetlands**. Water is stored as solid, frozen form in **ice sheets** and **glaciers**, and in **snowpack** at high elevations or near the Earth's poles. Most oxygen is a gas and is stored as **atmospheric moisture** over the ocean and land. In the soil, frozen water is stored as **permafrost** and liquid water is stored as **soil moisture**. Deeper below ground, liquid water is stored as **groundwater** in aquifers, within cracks and pores in the rock.

**Fluxes** move water between pools. As it moves, water can change form between liquid, solid, and gas. **Circulation** moves water in the oceans and transports water up to the atmosphere. Water moves between the atmosphere and the surface through **evaporation**, **evapotranspiration**, and **precipitation**. Water moves across the surface through **snowmelt**, **runoff**, and **streamflow**. Water moves into the ground through **infiltration** and **groundwater recharge**. Underground, groundwater flows within aquifers. It can return to the surface through natural **groundwater discharge** into rivers, the ocean, and from **springs**.

We alter the water cycle. We redirect rivers. We build dams to store water. We draw water from wetlands for development. We use water from rivers, lakes, reservoirs, and groundwater sources. We use that water to supply our **homes** and **communities**. We use it for **agriculture**, irrigation and **grazing** livestock. We use it for **industrial** activities like thermoelectric power generation, mining, and aquaculture. The amount of water that is available depends on how much water is in each pool, water quantity. It also depends on when and how fast water moves (water timing), how much water we use (water use), and how clean the water is (water quality).

We affect **water quality** in agricultural and urban areas, irrigation and precipitation water, fertilizers and pesticides into rivers and groundwater. River plants and factories return treated and contaminated water to rivers. Runoff carries chemicals, sediments, and sewage. Fishes and lakes. Downstream from these sources, contaminated water can cause harmful (alg) blooms, spread diseases, and harm habitats. **Climate change** is affecting the water cycle. It is affecting water quality, quantity, timing, and use. It is causing ocean acidification, sea level rise, and more extreme weather. By understanding these impacts, we can work toward using water sustainably.